

Multiple-Orifice Nozzle Assemblies For Dispensing Bands Of Material



2200-245-132-AA MSA Applicator


- ▶ Pattern Width Is Controlled By Width Of Nozzle Plate
- ▶ Innovative Pattern And Orifice Spacing Configured For Multiple Application Requirements
- ▶ Used In Conjunction With IPD, Servo-Flo or Program-A-Bead Positive Displacement Servo-Drive Dispense Systems
- ▶ Applicator Applies a 2.76" (70.1 mm) Width Pattern
- ▶ Patented Technology

BENEFITS

- Low Maintenance, Simple Mechanical Design
- Low Shear Application Reduces Wear
- Low Pressure Application For Improved Reliability
- Consistent Ribbon And Film Build
- Controlled Pattern Width
- Controlled Volumetric Metering

TYPICAL APPLICATIONS

- Water Based NVH Materials
- Liquid Applied Sound Deadener (LASD) Materials
- Vinyl Coatings
- Masking Applications
- Sound Deadening Applications

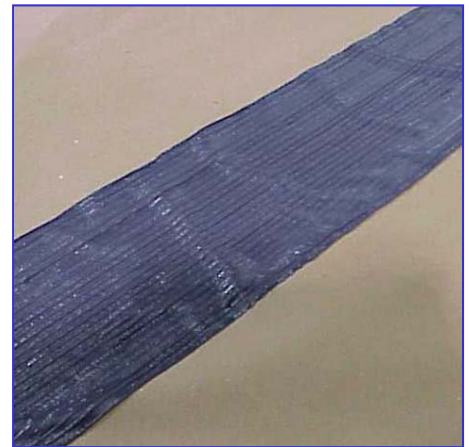

LASD APPLICATION

MSA - Multi-Stream Applicator

Specifications:

Max. Inlet Pressure:	4,000 P.S.I.
Dimensions:	4.11" (104.39 mm) H X 4.25" W (107.95 mm)
Weight:	1.65 Lbs. (.748 Kg)
Material Choices:	SST (Wetted Components)
Fluid Inlet Ports:	Two (2) 1/4" NPT Female Side Ports (One Normally Plugged)
Fluid Outlet Port:	(23) 0.036" Stream Orifices
Fluid Operation:	Select One 1/4" NPT Body Side Port Plug One Remaining 1/4 NPT Ports Attach Any 1/4" Nozzle To Outlet Port
Air To Open Ports:	One (1) 1/8" NPT Body Top Port
Air To Close Ports:	One (1) 1/8" NPT Body Side Port
Air Operation:	Double Air Operated; 60 PSI Min. (1) Side Port: Air To Close (1) Rotatable Cap Port: Air To Open
Mounting:	(2) #10 Socket Head Cap Screws
Alignment:	(2) Locator Holes With Clearance for .25" Dowel Pin
Service Kit:	2150-210-042 w/Needle & Ball Weldment



**2600-020-000 Manual
MSA Applicator**



2200-245-132-AA MSA Applicator

Additional Models:

- 2600-020-000 -132-AA w/ Vertical Pneumatic Handle**
- 2600-083-000 -132-AA w/ Pistol Grip Pneumatic Handle**

Form 245-132 Ver. A



Manufacturers of Precision Dispense Systems & Valves

45677 Helm Street • P.O. Box 701460
Plymouth, MI 48170 • USA
Phone: (734) 459-8600 Fax: (734) 459-8686
www.SealantEquipment.com
Email: valves@sealantequipment.com