



- ▶ **Snuf-Bak™** - medium to high viscosity materials
- ▶ **No-Drip®** - low viscosity - pourable materials
- ▶ **No-Flush™** disposable static mixers reduce waste and minimize maintenance
- ▶ Readily mounted using 2-alignment holes or clamp style mounting
- ▶ Double air operated (air to open / air to close) insures immediate start and stop to a dispense operation
- ▶ Available options:
  - ✓ For wide ratio materials
  - ✓ Stainless steel wetted components
  - ✓ Handles for manual operations

**Precise, efficient, and cost-effective:** three great reasons why the **2200-250-000 & 2200-545-000** automatic mix/dispense valves are tough to beat. These valves provide complete control over the application of metered two component adhesives or sealants - either automatically or manually. Arguably, they are the best 'point of application' dispense valves available.

### **Responsive**


The short stroke length and double air operation of the valve combine to produce an immediate start or stop to the dispense cycle making it ideal for automated applications.

### **Durable Design**

With wear resistant seals and hardened components, the valve's service life is enhanced - a distinct advantage for high volume, repetitive operations or when using filled or abrasive materials.


The unrestrictive internal design allows for the free flow of even high viscosity materials, while insuring that the two material components remain separate until they enter the **No-Flush™** mixer/nozzle.

# 2200-250 & 2200-545 Dual Spool Valves

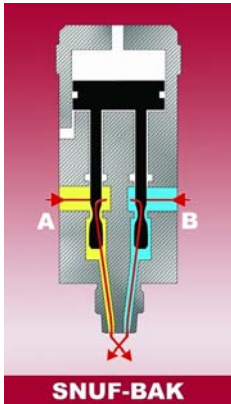


**SNUF-BAK**

2200-250 and 2200-595 Series Valves for Medium to High Viscosity materials

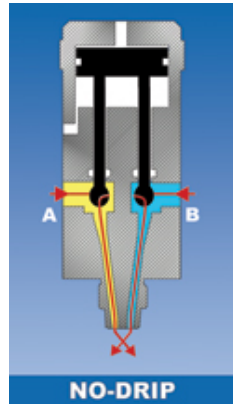


**NO-D RIP**

2200-545 Series Valves for Low Viscosity materials

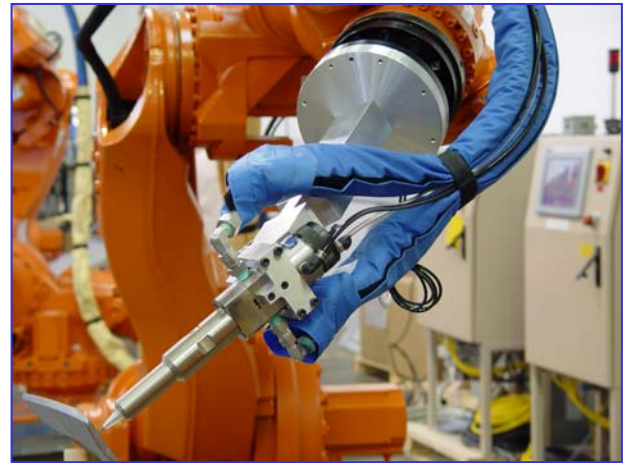

Mixers come in various sizes to meet extruding or streaming process application requirements

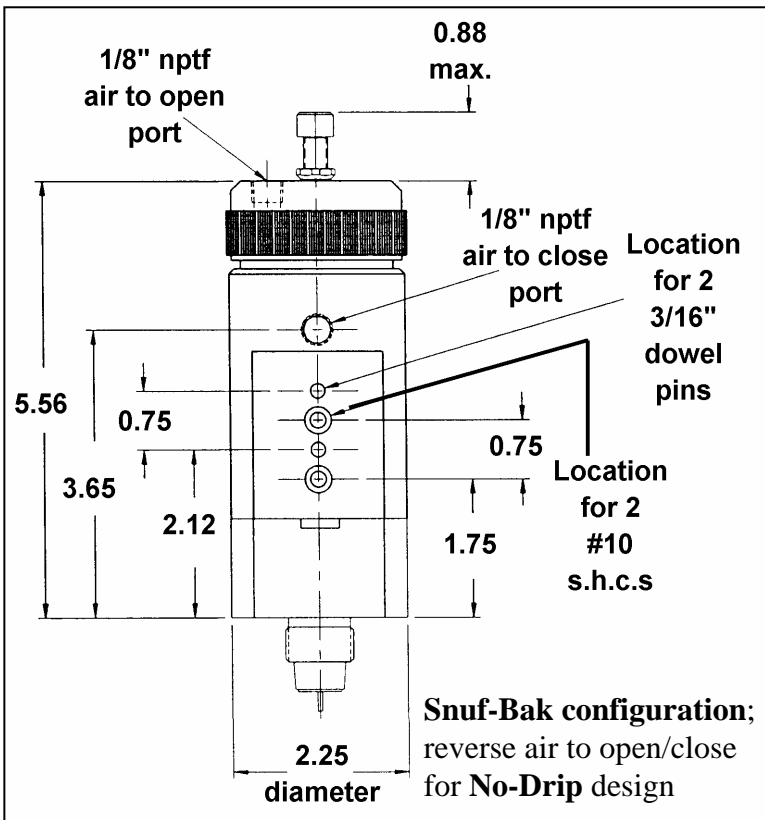

## Specifications

Dry Weight: ~ 5 lbs.

Max. Inlet Pressure: 3,500 P.S.I.

Construction: carbon steel (standard)  
stainless steel (optional)

Inlet port: 1/4" N.P.T.F.

Mounting: (2) - #10 s.h.c.s. drill thru

Alignment: (2) - #16 dowel holes

Operation: double air operated;  
air to open, air to close

## 2200-595 Series Valve:

For very high volume Snuf-Bak applications, see Model 2200-595-002 (dimensions and specifications are not as show here)

Form 2200-250/-545 Rev A



Manufacturers of Precision Dispense Systems & Valves

45677 Helm Street • P.O. Box 701460  
Plymouth, MI 48170 • USA  
Phone: (734) 459-8600 Fax: (734) 459-8686  
www.sealantequipment.com  
Email: Sales@SealantEquipment.com